



## PSG-3104A



LINK AMERICAN STANDARD

# PoE NETWORK SWITCH

4-Port GIGABIT Ethernet PoE SWITCH

## Scope of Application


PSG-3104A is an L2 unmanaged PoE switch with 4x10/100/1000Mbps ports, each PoE port allows to supply up to 30W and can supply power for IP Surveillance, VoIP Phone, wireless access point and other power devices. The plug & play technology enable this switch to interact with devices automatically after connected. The switch built-in flow control, it is to improve network performance for SMB applications in offices.

## Features Highlight

- **Auto negotiation**  
 PSG-3104A is unmanaged PoE switch and equipped with 5x10/100/1000Base-T, let the small work groups flexibly connected to the Ethernet. These intelligent port automatically detect network speed and automatic negotiation 1000Base-T, 100Base-TX and 10Base-T, as well as the full duplex and half duplex.
- **Traffic control safety transmission**  
 All ports support IEEE 802.3x flow control protocol. This function is when the port's receive buffer is full and sent collision signal, it can maximum limit reduce the packet is discarded. It is provided in full duplex and back-pressure flow control in half duplex.
- **Automatic MDI/MDI-X**  
 All ports support auto MDI/MDI-X crossover functions. Any port can use normal through twisted-pair cable, easy access to the server or switch.
- **PoE Support**  
 To reduce the required time and cost of installing additional electrical sources, the PSG-3104A implements PoE technology delivering power up to 30W per port to IEEE 802.3af/at. The switch supplies power over the same cable that is used to carry network traffic and delivers a power budget of 60W.
- **Power Adapter**  
 PSG-3104A is using a desktop power supply DC 55V/1.3A, easy to use and there are panel LEDs dynamic display.

## Applications

PSG-3104A supports an integration of various Powered Devices such as Wireless AP, IP Cameras or VoIP Phones where the power, voice, video and data are all transmitted on a single cable, eliminating the cost of extra cabling and deployment overhead to make the network more diversified, cost effective and efficiently manageable.

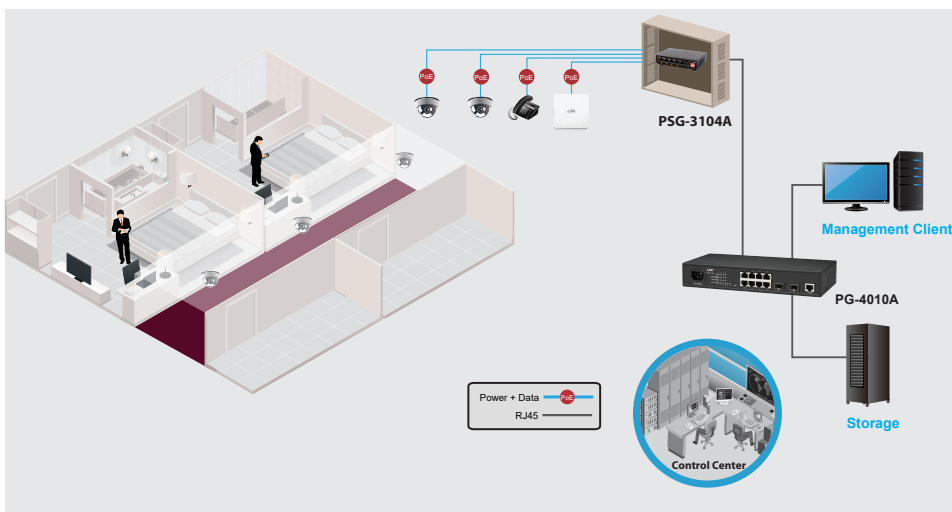



## Technical Data

Standards	
IEEE 802.3	10Base-T (Ethernet)
IEEE 802.3u	100Base-TX (Fast Ethernet)
IEEE 802.3ab	1000Base-T (Gigabit Ethernet)
IEEE 802.3x	Flow Control
IEEE 802.3az	Energy-Efficient Ethernet
IEEE 802.3af	Power over Ethernet (PoE)
IEEE 802.3at	Power over Ethernet Plus (PoE+)
Interface	
PoE Port	4 x 10/100/1000Base-T, RJ45 port
Uplink Port	1 x 10/100/1000Base-T, RJ45 port
LED Panel	PWR, 10/100M, 1000M, PoE, LNK/ACT
Features	
Performance	Switching Capacity: 10Gbps
	Forwarding Rate: 7.44Mpps
	Packet Buffer Memory: 1Mbits
	Jumbo Frame size: 9KBytes
	MAC Address: 2K
Features	Transmission Method: Store and Forward
	Layer 2 Switch
	L2 Unmanaged PoE Switch Flow Control, Auto-Nego, Auto MDI/MDI-X
Power	
PoE Power Budget	60W
Power Input	55V DC
Power Connection	DC Jack
Power Supply	100-240VAC, 50/60Hz, 55VDC/1.3A Power Adapter

Mechanical and Environment	
Housing	Metal
Dimensions (W x H x D)	121 x 26 x 75 (mm)
Weight	250g
Mounting	Desktop
Operating Temperature	0°C to 40°C
Storage Temperature	-40°C to 70°C
Operating Humidity	10% to 95% RH (non-condensing)
Storage Humidity	5% to 95% RH (non-condensing)

Certifications	
EMC	FCC Part 15, Subpart B Class A & CE Approved
	ANSI C63.4-2014
	EN55032: 2015+AC:2016 Class A
	EN55035: 2017
Green Product	LVD EN62368-1:2014
	EN/IEC/UL 60950-1
Green Product	RoHS

Ordering Information	
PSG-3104A	4-Port GIGABIT Ethernet PoE SWITCH

**Note :**

\* Specifications subject to change without notice.

## Drawing

