



UF-2166  
 UF-2166SM  
 UF-2166SM/APC


UF-2266  
 UF-2266SM  
 UF-2266SM/APC

LINK AMERICAN STANDARD

### Scope of Application

LINK adapter snap plates designed for convenient use with Fiber Optic Distribution Unit (FDU), rack mount drawer and wall mount enclosures. Provide nylon rivet (snap on) access easy to install and update. LINK adapter snap plate wide variety of singlemode and multimode plate options: ST, SC, FC, LC, MT-RJ and E2000., Premises installation, Data center, Telecommunication network, Ethernet, LAN and Fiber Optic Distribution Panel

### Drawing

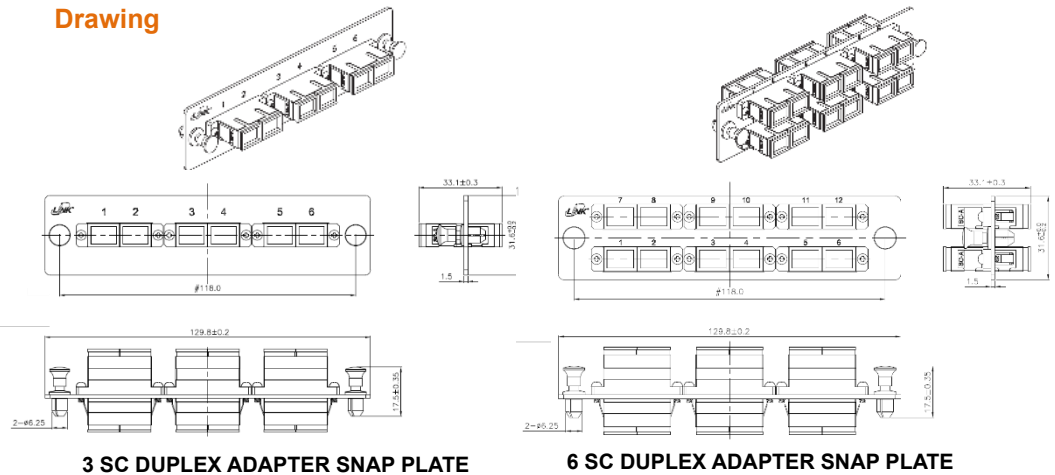


3 SC DUPLEX ADAPTER SNAP PLATE

6 SC DUPLEX ADAPTER SNAP PLATE

### FEATURES AND BENEFITS

- Suitable for all LINK FDU.
- Provides 6 and 12 ports for SC adapter.
- Low insertion loss.
- Good in repeatability and reconnect ability.
- Distribution Panel
- Loaded with adapter and included dust cap.
- Adapter type female to female.
- Nylon rivet allow for fast, easy, tool-free installation.
- Meets standard ANSI/TIA-568.3-D, ANSI/TIA-568-C.3, EIA/TIA-604 and ISO/IEC 11801:2017
- RoHS Compliant

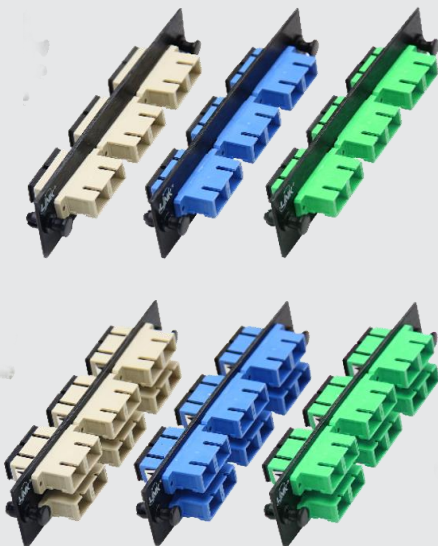



## SPECIFICATION

### SC ADAPTER SNAP PLATE

	<b>MULTIMODE</b>	<b>SINGLEMODE</b>
<b>Plate</b>	Aluminum	Aluminum
<b>Housing</b>	Black Anodize, Color PBT, UL 94V-0	Black Anodize, Color PBT, UL 94V-0
<b>Alignment Sleeve</b>	Ivory Color	Blue Color (Green Color, APC)
<b>Dust Cap</b>	Phosphor Bronze PP	Zirconia, ceramic PP
<b>Snap on</b>	Black Color Nylon rivet, 2 each	Black Color Nylon rivet, 2 each

### PERFORMANCE

	<b>MULTIMODE</b>	<b>SINGLEMODE</b>
<b>Insertion Loss</b>		
<b>Typical</b>	≤ 0.15 dB	≤ 0.15 dB
<b>Maximum</b>	≤ 0.30 dB	≤ 0.30 dB
<b>Durability</b>	500 cycles	500 cycles
<b>Operating Temperature</b>	-40°C to 85°C	-40°C to 85°C
<b>Storage Temperature</b>	-40°C to 85°C	-40°C to 85°C

## ORDER INFORMATION

### 6 FIBER ADAPTER SNAP PLATE

Part Number	Description	Type	No. of Fiber Port
UF-2166	3 SC DUPLEX ADAPTER SNAP PLATE	MULTIMODE	6
UF-2166SM	3 SC DUPLEX ADAPTER SNAP PLATE	SINGLEMODE	6
UF-2166SM-APC	3 SC DUPLEX ADAPTER SNAP PLATE	SINGLEMODE	6

### 12 FIBER ADAPTER SNAP PLATE

Part Number	Description	Type	No. of Fiber Port
UF-2266	6 SC DUPLEX ADAPTER SNAP PLATE	MULTIMODE	12
UF-2266SM	6 SC DUPLEX ADAPTER SNAP PLATE	SINGLEMODE	12
UF-2266SM-APC	6 SC DUPLEX ADAPTER SNAP PLATE	SINGLEMODE	12

Specifications subject to change without notice.

© 2023 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UF2X66, UF-2X66SM, UF-2X66SM-APC-V1.0\_01122023