

FTTx / FTTR DISTRIBUTION UNIT (RACK MOUNT)




- UF-4082A
- UF-4084A
- UF-4086A
- UF-4089A
- UF-4102A

LINK AMERICAN STANDARD

Scope of Application

LINK FDU (F.O. PATCH PANEL) Rack Mount provides a centralized point for termination, splice, storage and distribution of optical fibers, which are middle capacity both side operation, it is suitable for central offices connection points, data centers, local area network etc. It is an ideal solution for rack or cabinet mounting in compact areas. This unit provides excellent fiber patching management.

Drawing

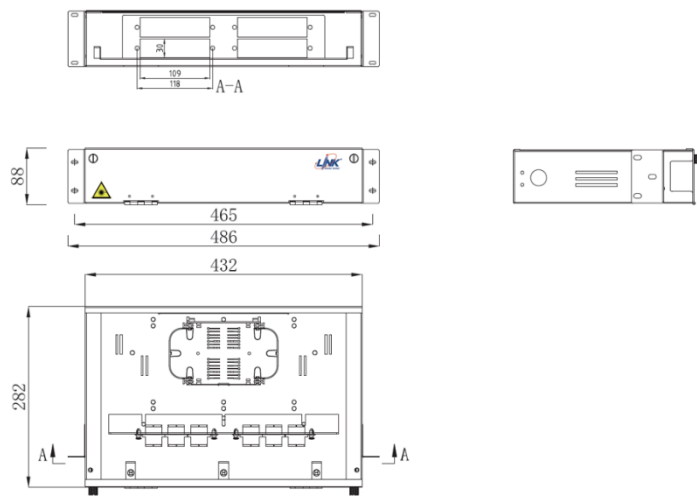

FEATURES

- Removable front-top cover for easier operations.
- Supported cable termination, splicing and distribution.
- Material: Body - Aluminum light weight, thickness 2 mm.
Inner Plate - Cold-rolled Steel, thickness 1.5 mm.
- Easy to install with 19" Rack Mounting.
- Easy operations: Drawer type.
- Mounting of Snap-In Plate can slide in and out to easy installation.
- Fully stable patch panel, no risk of movement.
- The front panel has space and able wire guide for organizing patch cords.
- Protected patch panel offers secure environment for adapters, patch cords and pigtailed.
- The product's height shall be 1U-5U. For 1U, the front cover equipped with hand-operated lock that can be easily open and close. For 2U-5U equipped with magnetic lock system that can be easily open and close.
- Adapter Panel adopted for easy operation. Cable fixing units provided.
- Suitable for all of LINK adapter snap plate such as ST, SC, FC and LC Adapter Snap Plate.
- Color coating reaching 100 microns(μm)
- The laser symbol and LINK trademark are clearly screened at the front.





SPECIFICATIONS

Part Number	Capacity	Rack Unit (U)	No. of Splice Tray	Capacity Snap –In Plate	In/Out Cable port	Dimension (mm) Depth
UF-4082A	12-24 Cores	1U	1	2	2	432X282X44
UF-4084A	24-48 Cores	2U	2	4	2	432X282X88
UF-4086A	48-72 Cores	3U	3	6	8	432X282X136
UF-4089A	72-96 Cores	4U	4	8	8	432X282X176.8
UF-4102A	120-144 Cores	5U	6	12	12	432X282X221.25

SPECIFICATIONS

Temperature	-40°C to 70°C
-------------	---------------

ACCESSORIES

- Splice Tray
- Cable tie
- Screw and Nut
- Protector sleeves
- Labeling paper

ORDER INFORMATION

Part Number	Descriptions	Capacity	Color
UF-4082A	FDU SLIDE 12-24 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	24F	Light Gray
UF-4084A	FDU SLIDE 24-48 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	48F	Light Gray
UF-4086A	FDU SLIDE 48-72 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	72F	Light Gray
UF-4089A	FDU SLIDE 72-96 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	96F	Light Gray
UF-4102A	FDU SLIDE 120-144 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	144F	Light Gray

*Note : All model without pigtail and adapter

Specifications subject to change without notice.

© 2023 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UF-40XXA-V1.0__071223