



UL-0002




JUMPER WIRE

Scope of Application

LINK Telephone Cable Jumper Wire is designed for connecting terminal equipment

Drawing

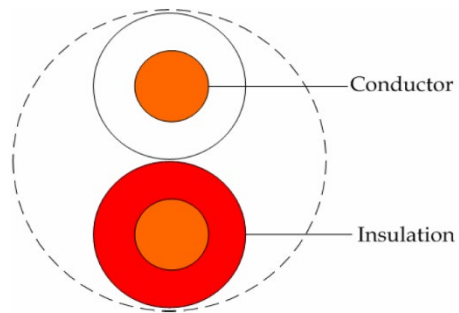

Technical Standard

- RoHS Compliance

Application

- Telephone handset or line cord



Cable Construction

Conductor	Diameter	0.50 ±0.015 mm. (24AWG)
	Material	Solid Bare Copper
	Number	1 Pair (2 core)
Insulation	Diameter	1.10 ±0.05 mm.
	Material	Polyvinyl chloride (PVC)
	Color	White & Red

ELECTRICAL CHARACTERISTIC

Test Item	
Conductor DC Resistance (Ω/km)	≤ 97.8
Unbalance of Pair DC Resistance (%)	≤ 300
Dielectric Strength between Pairs (kv/min)	≤ 1.0
Insulation Resistance ($M\Omega \cdot km$)	≥ 500

Order Information

Part number	Description	Length	Package
UL-0002	JUMPER WIRE WHITE-RED 2 CORE	100 m	Easy Box