



US-5003LZ-X

US-5006LZ-X

US-5010LZ-X

US-5015LZ-X

US-5020LZ-X

US-5025LZ-X


US-5030LZ-X



### Scope of Application

LINK Category 5e U/UTP patch cord, LSZH compliant ISO/IEC 11801 Class D and ANSI/TIA-568.2-D requirements for category 5e performance. Both end of the cable shall have RJ45 modular plug with transparent boot exceed IEC 60603-7, FCC Part 68 Subpart F specification and have 50 micro-inches of gold plating over nickel. The conductor made from stranded bare copper 24 AWG. Available length in 1, 2, 3, 5, and 10 meters or other. The patch cord shall be factory assembled with high quality control and 100% test. The outer jacket material made from LSZH compound to reduces the amount toxic smoke and corrosive has emitted during burned, for users' safety.

### Drawing

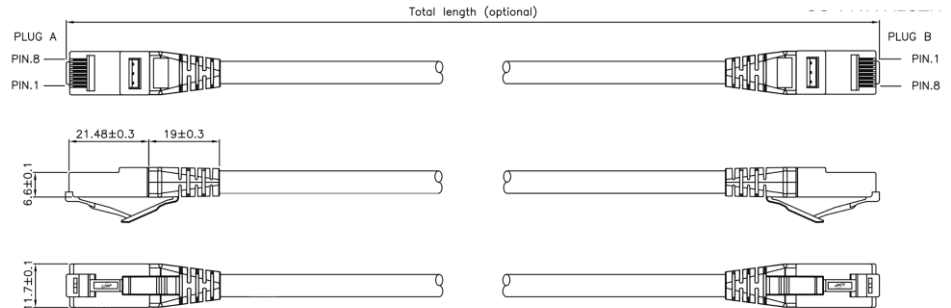

### Technical Standard

- ANSI/TIA-568.2-D Category 5e
- ANSI/TIA-568-C.2 Category 5e
- ISO/IEC 11801:2017 class D
- EN 50173-1 Category 5e
- EN 50288-3-2
- IEC 61156-6, IEC 60332-1
- IEC 61034-1, IEC 61034-2
- IEC 60754-1, IEC 60754-2
- IEC 60603-7, FCC Part 8 Subpart F
- RoHS Compliant



## Construction and Properties

<b>Conductor</b>	<b>Material</b>	Stranded bare Copper
	<b>No. of Conductor</b>	4 Pairs (8 wires)
	<b>Diameter</b>	24 AWG
<b>Insulation</b>	<b>Material</b>	High-Density Polyethylene (HDPE)
	<b>Diameter</b>	0.98 ±0.05 mm
<b>Color code</b>	<b>Pair 1</b>	White-Blue / Blue
	<b>Pair 2</b>	White-Orange / Orange
	<b>Pair 3</b>	White-Green / Green
	<b>Pair 4</b>	White-Brown / Brown
<b>Jacket</b>	<b>Material</b>	Lead-free, FR-LSZH
	<b>Cable Diameter</b>	5.40 ±0.2 mm
<b>Flame Rating</b>	<b>Flame Rating</b>	LSZH
<b>Boot</b>	<b>Material</b>	Clear PVC, Slim model
<b>Plug Housing</b>	<b>Material</b>	Clear polycarbonate with LINK logo, UL 94V-0
<b>Pin Contact</b>	<b>Material</b>	Phosphor Bronze with 50 micro-inch gold plated

## Electrical Characteristics

<b>Impedance</b>	100 ±15 Ohms, 1 MHz to 350 MHz
<b>Capacitance</b>	13.5 pf/ft at 1MHz
<b>Dielectric Strength</b>	2.5kV/min
<b>Voltage Rating</b>	150V AC/DC

## Physical Properties

<b>Pulling Force</b>	50 N (11.24 lbs.) minimum	
<b>Durability</b>	800 cycles	
<b>Minimum Bending Radius</b>	4 x Cable Diameter	
<b>Wiring Pattern</b>	T568B	
<b>Temperature</b>	<b>Storage</b>	-20°C to 70°C
	<b>Operation</b>	-20°C to 65°C



## Application

- 2.5G BASE-T (IEEE 802.3bz)
- 1000 BASE-T (IEEE 802.3ab Gigabit Ethernet)
- 1000 BASE-TX (TIA/EIA-854)
- 100 BASE-TX (IEEE 802.3u Fast Ethernet)
- 10 BASE-T (IEEE 802.3i Ethernet)
- 52/155/622Mbps and 1.2Gbps ATM
- 4/16 Mbps Token Ring
- IEEE 802.3af (PoE), IEEE 802.3at (PoE+)
- TP-PMD, TPDDI, ISDN, CDDI, VoIP
- EtherCAT Industrial standard, HDBaseT 2.0 standard
- Baseband, Broadband
- Digital and analog for data, video, and audio application

## Order Information

Part number	Description	Color	Package
US-5003LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 1 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5006LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 2 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5010LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 3 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5015LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 5 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5020LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 10 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5025LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 15 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack
US-5030LZ-X	CAT 5e RJ45-RJ45 PATCH CORD, LSZH, 20 m	X=1: White, 2: Red, 3: Green, 4: Blue, 5: Yellow	Pack

\*Available other color and length on request

Specifications subject to change without notice.

© 2023 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

US-50XXLZ-X-V1.1-140225