



UT-1310HA



LINK AMERICAN STANDARD

F.O. MEDIA CONVERTER

10/100/1000 HARDENED CONVERTER, SFP Slot

Scope of Application

UT-1310HA Gigabit Hardened Media Converter is specifically designed for rugged and harsh industrial environments where require the extended temperature. So it's suitable for outdoor locations which demand maximum bandwidths, and engineered to offer a solution for networks that are ready to expand or migrate from copper-based Gigabit triple speed to Fiber-based Gigabit network. Along with the capability of converting media transmissions, UT-1310HA features intelligent functions like Auto MDI/MDIX, LFS (Link Fault Signalling), LEDs, DIP switches etc to provide easy plug-and-play, continuous monitoring and thereby minimize downtime for mission-critical networks.



Featuring an RJ45 port and an SFP slot, UT-1310HA converts 10/100/1000Base-T network to 1000Base-SX/LX fiber network or vice versa by easily integrating copper with fiber and allowing them to operate smoothly. This gives the utmost flexibility in installing various connections over fiber and extend the reach of Gigabit Ethernet connectivity over single-mode or multi-mode fiber via SFP module. UT-1310HA offers you the most economic and cost-effective solution to meet your need for long distance transmissions up to 120km.

Features Highlight

- 1 x 10/100/1000Base-T, RJ45 port (Support Full/Half duplex operations)
- 1 x 100Base-FX/1000Base-X with SFP Slot
- Auto MDI/MDI-X and Auto-negotiation (NWay or auto-sensing) on RJ45
- Extends distance for Gigabit Ethernet network up to 2km with multi-mode up to 120km with single-mode
- Support packet size up to 9KB
- Enhanced with DIP-Switch for Link Fault Signaling, Loop-back Testing and SFP dual speed setting
- Support to transmit VLAN packets (IEEE802.1q)
- Support to transmit Quality of Service (IEEE802.1p)
- Support to transmit STP packets (IEEE802.1d)
- Built-in flow control (IEEE 802.3x)
- Support Hot-swappable for a working system without interrupting its operation
- LFS with ALM's LED to indicate link failure status and
- Support for redundant link to be working with L2 managed switch
- LEDs for device status
- Equipped with 12VDC, 1.5A AC adapter
- Operating temperature from -10°C to 60°C

Applications

The converter is functioning as a high-speed bridge between switches creating increased capacity for each user (node) on the local area network. It is providing a 1000Mbps full duplex link to a variety of Gigabit Ethernet network devices within a LAN.

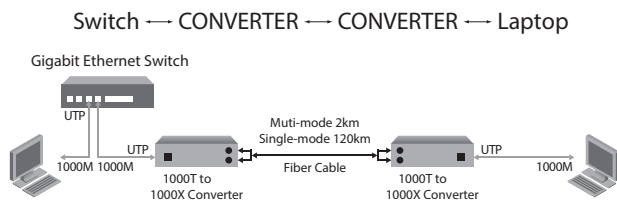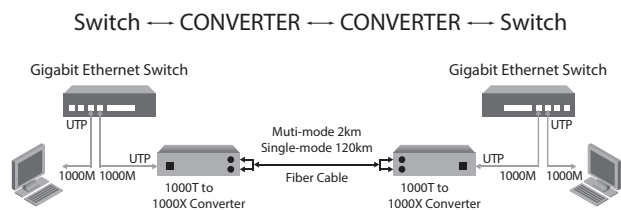



Technical Data

| Standards | |
|----------------------------|--|
| IEEE 802.3 | 10Base-T |
| IEEE 802.3u | 100Base-TX, 100Base-FX |
| IEEE 802.3ab | 1000Base-T |
| IEEE 802.3z | 1000Base-X (SX/LX) |
| IEEE 802.3x | Flow Control |
| Fiber Optic | |
| Port | 1 x 100Base-FX/1000Base-X with SFP Slot |
| Connector Type | LC |
| Distance | Up to 120km (based on SFP types) |
| LAN (RJ45) | |
| Port | 1 x 10/100/1000Base-T |
| Speed | Up to 1000Mbps |
| Max. Distance (meter) | 100 |
| Power | |
| Power Input | 12VDC, DC Jack |
| Power Consumption | 6 Watt |
| Power Adapter | 100-240VAC, 50-60Hz, 12VDC/1.5A Adapter |
| Mechanical and Environment | |
| Housing | Aluminum (IP30 Protection) |
| Dimensions (W x H x D) | 73.8 x 23.4 x 109.2 mm |
| Weight | 150g |
| Mounting | Desktop, DIN-Rail, Wall-mounted |
| Operating Temperature | -10°C to 60°C |
| Storage Temperature | -40°C to 85°C |
| Operating Humidity | 5% to 95% RH (non-condensing) |
| Storage Humidity | 5% to 95% RH (non-condensing) |
| LED Panel | PWR, Fiber, RJ45, 1000, LNK/ACT, ALM (LFS) |

| DIP-Switches | |
|---------------------------------|--|
| LFS | Link Fault Signaling function |
| LLB | Local Loopback function |
| RLB | Remote Loopback function |
| 1000 | 100FX SFP transceiver |
| Certifications | |
| EMC | FCC Part 15 of Class A & CE Approved |
| | EN 55022 Class A |
| | EN 61000-3-2 |
| | EN 61000-3-3 |
| | EN 55024 |
| | IEC/EN 61000-4-2 (ESD) Level 4 |
| | IEC/EN 61000-4-3 (RS) Level 2 |
| | IEC/EN 61000-4-4 (EFT) Level 2 |
| | IEC/EN 61000-4-5 (Surge) Level 3 |
| | IEC/EN 61000-4-6 (CS) Level 2 |
| IEC/EN 61000-4-8 (PFMF) Level 2 | |
| IEC/EN 61000-4-11 | |
| Green Product | RoHS |
| Ordering Information | |
| UT-1310HA | 10/100/1000 HARDENED CONVERTER, SFP Slot |

Note :

* Specifications subject to change without notice.

Drawing

