American Standard

UV-9012H

CCTV OUTDOOR CABINET

TWO LAYER DOOR

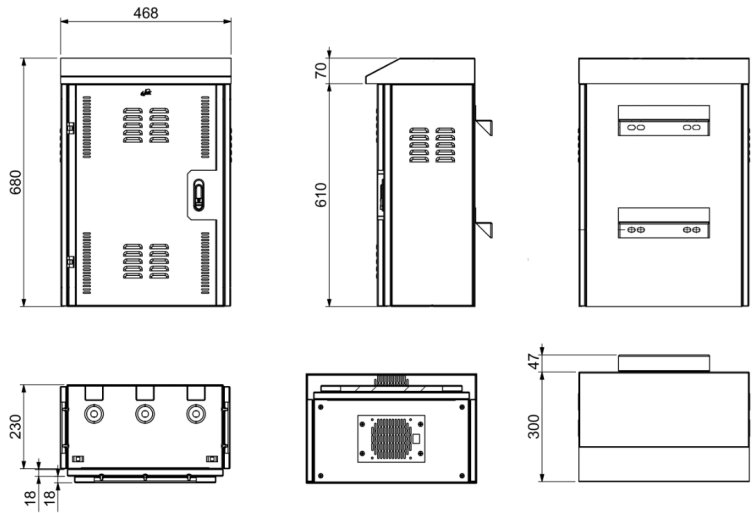### Scope of Application

Hanging cabinet type for outdoor installation, suitable for CCTV system, Suitable for Fiber Optic Equipment, Industrial Media Converter and Industrial Ethernet Switches

Drawing

Technical Standard

- ASTM D522
- ASTM D3363
- ASTM D3359
- Salt spray test 500 hrs.
- ISO 9001 : 2015
- ISO 14001 : 2015

www.linkcable.com

UV-9012H-V1.1-121223

Features

- Hanging cabinet type for outdoor, suitable for CCTV system and fiber optic distribution.
- Suitable for fiber optic equipment, industrial media converter and industrial Ethernet switches.
- Designed for Two Layer Door.
- Two Layers Door suitable for harsh environment with outdoor installation. Designed of two layers with the Sun Shield layer for better protection. Index of protection IP54.
- Produced from Electro-Galvanized Sheet steel, light weight and completed rust proof.
- Provide build in Push Lock at front door.
- Water-proof and ventilation by roofer at side panels.
- Roof Cover can be mounted with single of 4" ventilation fan (CK-80104) to release the accumulated heat inside the cabinet and extend the life of equipment.
- Side panels and roof cover are water proof by special rubber seal.
- Provide cable guide inside the cabinet for manages all the cables.
- Provide 3 knock out holes size 3/4 " and 1" for cable entry.
- Provide Din Rail for install the industrial converter, switch and power supply.
- The removable plate with stud can be containing double splice tray (SV-2256) and 2 EA of adapter snap plate for 24 Fiber core.
- Provide ground wire connecting between structure cabinet and front door.

Material

- Frame   : 1.2 mm Electro-galvanized steel sheet
- Removable Plate   : 1.5 mm Electro-galvanized steel sheet
- Back Support Bar   : 2.0 mm Electro-galvanized steel sheet
- Electrostatic powder coating, Medium Gray

Order Information

Part number	Description	Height (cm.)	Width (cm.)	Depth (cm.)	IP Rating
UV-9012H	CCTV OUTDOOR STEEL CABINET, Two LAYER Door	68	46.8	26.8	IP54