

FIBER OPTIC OUTDOOR TERMINAL STEEL CABINET




- UF-4112A
- UF-4114A
- UF-4116A
- UF-4119A
- UF-4120A
- UF-4114A

LINK AMERICAN STANDARD

Scope of Application

LINK Fiber Optic Terminal, Outdoor Steel offers ideal environment for optical fibers to be spliced and working under both indoor and outdoor environments. It is perfect cost-effective solution provider in the optical fiber network.

Drawing

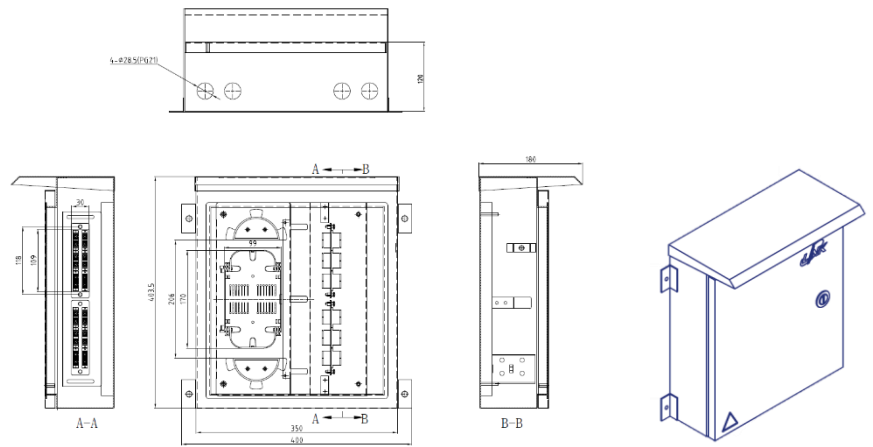

FEATURES

- Supported cable termination, splicing and distribution.
- Material: Body - Aluminum light weight, thickness 2 mm.
- Inner Plate - Cold-rolled Steel, thickness 1.5 mm.
- I Frame - Aluminum light weight, thickness 2 mm.
- Easy to install: It is ready for wall mount and pole mount installation kits provided.
- Solid and fully-closed structure with pleasing appearance.
- Cable fixing units provided to fix the outdoor optical cable.
- The bottom of the cabinet has a hole for the cables in - out.
- Accommodates both cable glands as well as tie-wraps.
- Provided 6 mm² grounding wire is connected between the body and front door.
- Mounting of Snap-In Plate can slide in and out to easy installation.
- Suitable for all of LINK adapter snap plate such as ST, SC, FC and LC Adapter Snap Plate.
- Design individual removable each splice tray
- Support IP65 standard.
- Supported security locking system.
- Color coating reaching 100 microns (µm)
- The laser symbol and LINK trademark are clearly screened at the front.





SPECIFICATIONS

Part Number	Capacity	No. of Splice Tray	Capacity Snap –In Plate	No. of In/Out Cable port Φ 28.5mm (PG21)	Dimension (mm) H x W x D
UF-4112A	24 Cores	1	2	2	403.5X350X180
UF-4114A	48 Cores	2	4	2	403.5X350X180
UF-4116A	72 Cores	3	6	8	460X390X200
UF-4119A	96 Cores	4	8	8	550X490X250
UF-4120A	120 Cores	5	10	12	550X490X275
UF-4144A	144 Cores	6	12	12	550X490X300

SPECIFICATIONS

Temperature	-40°C to 70°C
-------------	---------------

ACCESSORIES

- Cable tie
- Cable gland
- Protective sleeves
- Labeling paper
- Heavy Duty Master Key
- Screw and Nut
- Splice Tray
- I-Frame For Wall Mount

ORDER INFORMATION

Part Number	Descriptions	Capacity	Color
UF-4082A	FDU SLIDE 12-24 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	24F	Light Gray
UF-4084A	FDU SLIDE 24-48 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	48F	Light Gray
UF-4086A	FDU SLIDE 48-72 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	72F	Light Gray
UF-4089A	FDU SLIDE 72-96 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	96F	Light Gray
UF-4102A	FDU SLIDE 120-144 C, Slide w/Cover, Rack Mount, w/Tray & Acc.	144F	Light Gray

*Note : All model without pigtail and adapter

Specifications subject to change without notice.

© 2023 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UF-41XXA-V1.1__211124