



UT-901G-XX



LINK AMERICAN CABLING

Scope of Application

The LINK SFP transceivers (SFP is also called "mini-GBIC") are high performance, cost effective modules which is the best for all LINK Media Converters, all LINK Switches and can be compatible with other brands.

LINK SFP transceivers provide extended connectivity up to 220/550m or 2km transmission distance with Multi-mode fiber (MMF) and up to 120km transmission distance with Single-mode fiber (SMF).


LINK SFP transceivers are a hot-pluggable (or hot-swappable). You can plug-in and out the transceiver to/from any SFP port without having to power down the network devices.

Features Highlight

- Compliant with IEEE 802.3z Gigabit Ethernet standard
- Support data rate up to 1.25Gbps
- Industry standard small form-factor pluggable (SFP) package
- Compliant with Multi-Source Agreement (MSA) and SFF-8472
- Duplex LC connector
- 850nm VCSEL laser and PIN photodetector
- 1310nm FP laser and PIN photodetector
- Support Digital Diagnostic Monitoring Interface (DDMI)
- Single power supply 3.3V
- TTL signal detect indicator
- Hot-Pluggable
- Class 1 laser product complies with EN 60825-1
- Operating temperature from 0°C to 70°C
- Plug and Play Installation
- RoHS Compliant

Applications

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Media Converter to Switch interface
- Media Converter to Media Converter interface
- Network Storage
- Router/Server interface
- Switched backplane applications
- Other optical transmission systems
- 1000Base-SX, 1000Base-LX, 1000Base-ZX

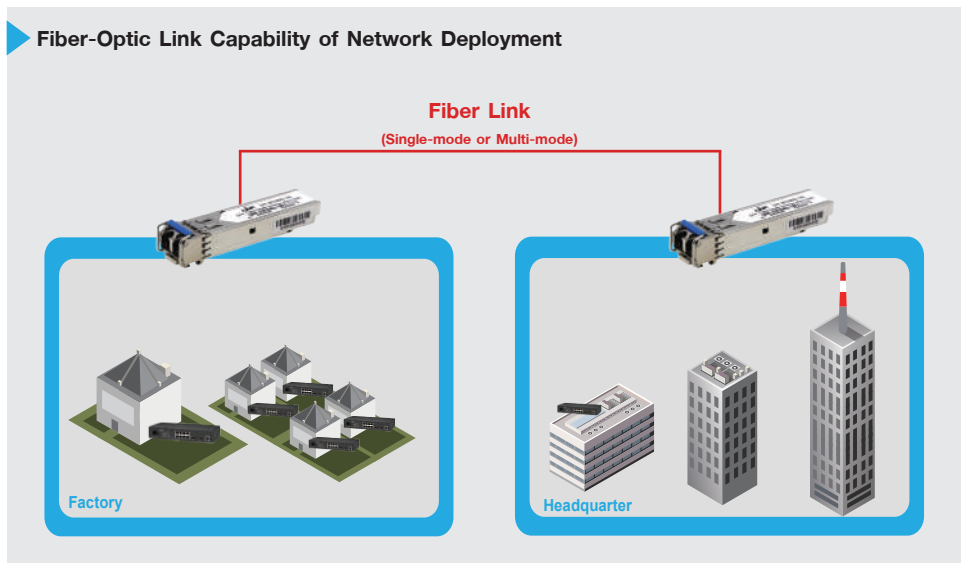



Technical Data

Standards	
IEEE 802.3z	1000Base-X
Mechanical and Environment	
Form Factor	SFP
Connector	Duplex LC
DDMI/DOM	Supported
Power Supply Voltage	3.3V
Operating Temperature	0°C to 70°C
Storage Temperature	-40°C to 85°C
Operating Humidity	5% to 95% RH (non-condensing)
Storage Humidity	5% to 95% RH (non-condensing)
Compatible List	Alcatel, Allied Telesis, Arista, Aruba, Avaya, Brocade,
	Cisco, Cisco Meraki, Dahua, Dell, Delta, D-Link,
	Ericsson, Extreme, Fiberhome, Fortinet, H3C,
	Hikvision, Hirschmann, HP/HPE, Huawei, IBM,
	INTEL, Juniper, Linksys, Mellanox, MikroTik, Moxa,
	Netgear, Nokia, Nortel, Palo Alto, QNAP, Ruckus,
	Ruijie, Sophos, Synology, TP-Link, Ubiquiti, ZTE, Zyxel, etc.

Certifications	
ESD	MIL-STD-883E Method 3015.7
	IEC 61000-4-2
EMI	CISPR22 ITE Class B
	FCC Class B & CE
	EN 55022
EMC	VCCI Class 1
	IEC 61000-4-3
Product Safety	FDA 21 CFR 1040.10 and 1040.11
	Class 1 Laser
	EN 60825-1
	EN 60825-2
Green Product	EN 60950-1
	RoHS
Ordering Information	
UT-901G-XX00	1.25G SFP SX MMF 850nm 550m
UT-901G-XX02	1.25G SFP MMF 1310nm 2km
UT-901G-XX10	1.25G SFP LX SMF 1310nm 10km
UT-901G-XX20	1.25G SFP LX SMF 1310nm 20km
UT-901G-XX40	1.25G SFP EX SMF 1310nm 40km
UT-901G-XX80	1.25G SFP ZX SMF 1550nm 80km
UT-901G-XX120	1.25G SFP ZX SMF 1550nm 120km

Note :

* Specifications subject to change without notice.

* XX is code of transceiver as requested from compatible list.

LC = LINK-Cisco CN = Ciena IB = IBM
 HP = Hewlett Packard DL = Dell IT = INTEL
 AB = Aruba ES = Ericsson JP = Juniper
 AA = Adva/Adtran ET = Extreme MN = Mellanox/Nvidia
 AL = Alcatel-Lucent FN = Fortinet NK = Nokia
 AT = Arista HC = H3C SM = Siemens
 AY = Avaya HM = Hirschmann ZT = ZTE
 BC = Brocade HW = Huawei

Optical Characteristics

Part Number	Transmit Power (dBm)	Receiver Sensitivity (dBm)	Wavelength (nm)	Operation Distance (m)					Input Voltage (V)	Connector
				OM1 62.5/125	OM2 50/125	OM3 50/125	OM4 50/125	OS2 9/125		
UT-901G-XX00	-9 to -3	-17	850	220	550	550	550	-	3.3	Duplex LC
UT-901G-XX02	-11 to -3	-20	1310	1,000	2,000	2,000	2,000	-	3.3	Duplex LC
UT-901G-XX10	-9 to -3	-20	1310	-	-	-	-	10,000	3.3	Duplex LC
UT-901G-XX20	-9 to -3	-20	1310	-	-	-	-	20,000	3.3	Duplex LC
UT-901G-XX40	-5 to 0	-23	1310	-	-	-	-	40,000	3.3	Duplex LC
UT-901G-XX80	0 to +5	-23	1550	-	-	-	-	80,000	3.3	Duplex LC
UT-901G-XX120	0 to +5	-31	1550	-	-	-	-	120,000	3.3	Duplex LC



Drawing

