



CH-10512


## PDU UNIVERSAL OUTLET

12 UNIVERSAL OUTLET (Circuit Breaker 32A + Power Plug 32A)

### Scope of Application

LINK Power Distribution Unit (PDU) can meet the general requirements of power distribution and special demand. Solid, easy installation and modular composite structure are the basic characteristics. Security and stability are our guarantee for the products. The products can meet the installation requirements of 19" standard cabinet and non-standard cabinet. More control, outlet standards, accessibility functions can be customized. Applications support datacenter, telecommunications, PC systems, audio video, security, sound and other. Ideal for distribution of UPS, generator or other AC power to protected equipment.

### Drawing

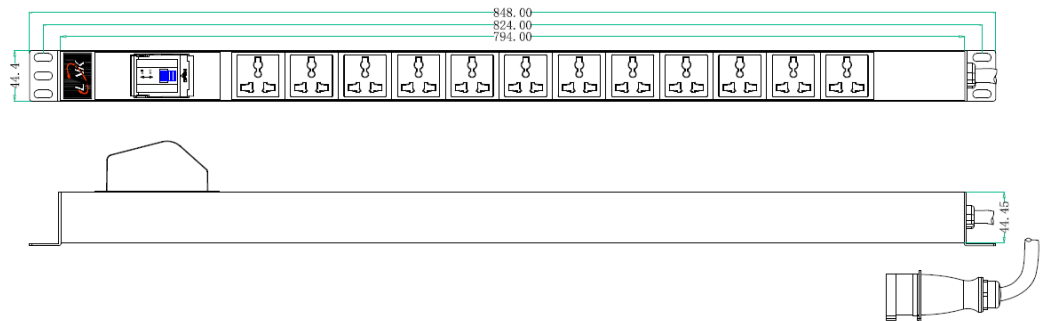

### Technical Standard

- IEC 60309
- RoHS



## Specifications

- Nominal Voltage : 220 - 250VAC
- Frequency : 50/60Hz
- Maximum Amps : 32A
- Maximum Power : 8,000W
- Plug Type : IEC 60309 2P+E (32A)
- Outlet Type : Universal
- Circuit Breaker : 32A (1Pole)
- Power Cord Length (m) : 3m.
- Power Cord Electrical Wiring : 3x6mm<sup>2</sup> (32A)
- Socket material : Engineering Plastic
- Panel Material : Aluminium Alloy
- Outlet quantity : 12 Outlets
- PDU Bracket Kit : Included 1 Pairs
- Warranty : 1 Year

## Order Information

| Part number | Description                                                    | Power Cord |
|-------------|----------------------------------------------------------------|------------|
| CH-10512    | PDU 12 Universal Outlet (Circuit Breaker 32A + Power Plug 32A) | 3m.        |

Specifications subject to change without notice.

© 2023 LINK CORP. ALL RIGHTS RESERVED

[www.linkcable.com](http://www.linkcable.com)

CH-10512-V1.3-190325