## LINK RACK



# CW1-60406G CW1-60409G

## CW1-60412G



### Scope of Application


The premium innovation design, an elegant appearance, delivered with best enterprise service, support and reliability. LINK Glass Wall Rack offered high strength product, high durability and efficiency at work, also can support to install 19"Standard's equipment.

#### Drawing







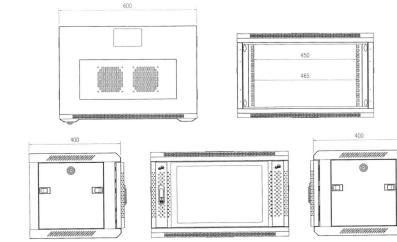

\*For reference only

#### **Technical Standard**

- ANSI/EIA-310D
- IEC 60297-1
- IEC 60297-2
- BS 5954 Part : 2
- DIN 41494
- 19"Rack Standard
- ISO 9001 :2015
- ISO 14001 : 2015









#### **Features**

- Cabinet made from Electro-Galvanized Steel Sheet and 4-Mounting pole.
- Front door with "See-through" Tempered Glass and perforated surrounding for ventilation, swing handle lock was provided.
- Back part with hanger slots (steel frame) and provided 4 sets of Wall mounting screw.
- Mounting pole can be adjustable with screened Rack Unit (U) on the pole.
- Cable access at the top and the base.
- Raised roof with vented and perforated surrounding for ventilation, can be mounted maximum 3 ventilating fans.
- Provided nuts and screws according to no. of Rack unit (U) for convenience to install network equipment.
- Both side panels are easy to open by slide lock and provided security lock for installation and maintenance.
- 180°° opening door and can change the opening direction.
- Grounding system connected between cabinet's structure and front door.
- Supplementary accessories: shelves, drawers, fan sets, power distribution unit.

#### **Material**

- Frame : 1.2 mm Electro-galvanized steel sheet
- Rear and Side Panels : 1.2 mm Electro-galvanized steel sheet
- Solid blanking plate : 1.2 mm Electro-galvanized steel sheet
- Glass Door : 5.0 mm Tempered glass
- Mounting Pole : 2.0 mm Electro-galvanized steel sheet with Zinc coated
- Electrostatic powder coating, Black (RAL9004)

#### **Order Information**

Part number	Description	U Height (U=4.45 cm.)	Width (cm.)	Depth (cm.)	Height (cm.)
CW1-60406G	19"LINK GLASS WALL RACK 6U, Depth 40cm., 1Part	6U	60	40	37
CW1-60409G	19"LINK GLASS WALL RACK 9U, Depth 40cm., 1Part	9U	60	40	50.5
CW1-60412G	19"LINK GLASS WALL RACK 12U, Depth 40cm., 1Part	12U	60	40	64

